

DESCRIPTION

Gyvlon SoundBar screed is a blend of Gyvlon Binder, selected aggregates and clean potable water, to produce a pumpable self-smoothing, flowing screed (manufactured to BSEN 13813:2002 and to the specific requirements of the SoundBar system).


USES

Gyvlon SoundBar screed is designed specifically to be used as part of the Soundbar system, for use over timber joists both in masonry and timber framed designs. The system can be used in both commercial and residential projects and is ideally suited where improved acoustic, loading and durability are required.

For advice on specifications and proprietary systems please contact the Gyvlon Technical and Specification team

SYSTEM SPECIFIC FEATURES

- Increased productivity compared to floating floor treatments
- Improved loading compared to floating floor treatments
- Can easily accommodate UFH within the screed zone
- Ideal for use with UFH
- No need for loading out prior to flooring
- Easily achieves SR2 as described in BS8204:7
- Protein Free – cannot harbour bacteria
- Minimum thermal expansion (0.012mm/mK)
- Dries at a rate of 1mm per day up to 40mm in good conditions
- Excellent UFH performance compared to floating floors
- Environmentally friendly

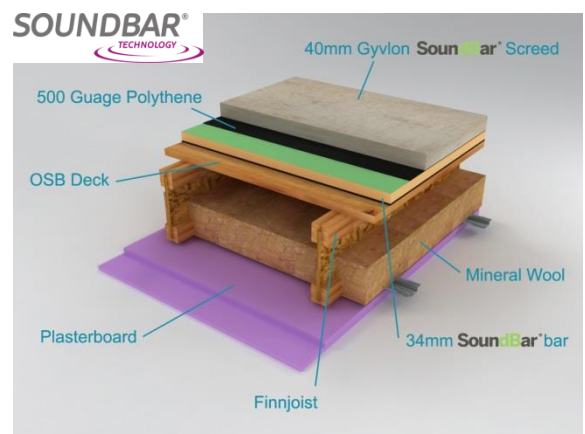

TECHNICAL DATA

Appearance/Colour:	Off-white fluid mortar
Water demand:	13-18 % b.w
pH:	> 10
Wet Density:	2230 kg/m ³
Dry Density:	2000 kg/m ³

Typical Screed Properties:

Compressive Strength:	C35 N/mm ²
Flexural Strength:	7 N/mm ²

ANHYDRITEC

Tel. 01925 428780

E. sales@anhydritec.com

221, Europa Boulevard,

Warrington WA5 7TN

www.gyvlon.com – www.anhydritec.com



ANHYDRITEC
Minersa Group

MINIMUM APPLICATION THICKNESS

Soundbar System

Without UFH: 40mm

Soundbar System

With UFH: Minimum 45mm
(25mm minimum, 30mm nominal) cover to pipes, heating elements.

DELIVERY

GYVLON SoundBar is supplied via a concrete plant in truck mixers, Transmix trucks or as pre blended bags.

ENVIRONMENTAL

Gyvlon Soundbar is produced using Gyvlon binder, which is manufactured from an industry by product.

Gyvlon Binder – 98% Recycled Content

Gyvlon Screed – Average 36% Recycled Content

Recyclability – 100% Recyclable

VOC Content – VOC Free

HEALTH & SAFETY

Please consult the relevant Health & Safety Data Sheets, available from the screed manufacturer on request and provided with each delivery.

ANHYDRITEC

Tel. 01925 428780

E. sales@anhydritec.com

221, Europa Boulevard,

Warrington WA5 7TN

www.gyvlon.com – www.anhydritec.com



ANHYDRITEC
Minersa Group